




ETST-01

Voltage:220V
Power:800W
Tube Material:SUS 310s
Resistance Wire:2080 Nichrome wire
Dimension:Dia(10mm)*Length(280mm)
Leakage current:<0.5MA/KW
Power Tolerance:+5%, -10%



ETST-02

Voltage:220V
Power:500W
Tube Material :SUS 316L
Resistance Wire:2080 Nichrome wire
Dimension:Dia(16mm)*Length(450mm)
Leakage current:<0.5MA/KW
Power Tolerance:+5%, -10%
Resistance Tolerance:+10%, -5%

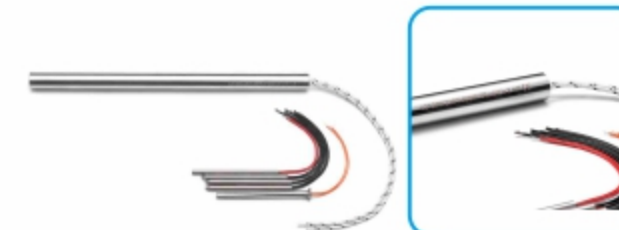

ETST-05

Voltage: 220V
Power:500W
Tube Material:SUS 310S
Resistance Wire:2080 Nichrome wire
Dimension:Dia(6mm)*Length(200mm)
Leakage current:<0.5MA/KW
Power Tolerance:+5%, -10%
Resistance Tolerance:+10%, -5%



ETST-03

Voltage:220V
Power:500W
Tube Material:SUS 310S
Resistance Wire:2080 Nichrome wire
Dimension:Dia(12mm)*Length(300mm)
Leakage current:<0.5MA/KW
Power Tolerance:+5%, -10%
Resistance Tolerance:+10%, -5%



ETST-04

Voltage: 220V
Power:500W
Tube Material:SUS 310S
Resistance Wire:2080 Nichrome wire



ETST-06

Voltage: 220V
Power: 500W
Tube MaterialL : SUS 310S
Resistance Wire: 2080 Nichrome wire
Dimension: Dia(6.5mm)*Length(200mm)
Leakage current: <0.5MA/KW
Power Tolerance: +5%, -10%
Resistance Tolerance: +10%, -5%

